



适用于多种用途，产品性能与品质良好  
金属外壳，便于安装保护，配有醒目的指示灯，便于查看工作状态

### 圆柱形电感式接近传感器MI系列 Cylindrical inductive proximity sensor MI series

It is suitable for a variety of purposes.  
The metal shell with good product performance and quality is easy to install and protect. It is equipped with a striking indicator light to check the working status



#### ▶ 型号说明 Model Explanation

M	I	04	-1	N	K	-Z	-□	-□
基本型号Model M:型号代码 Model code MI: 特殊型号定义 Special definition	传感器类别: I:常规圆柱形 电感式 Cylindrical inductive proximity sensor	直径OD: 0.3:3mm 04:4mm 0.5:5mm	检测距离 Sensing distance: 1:1mm	输出方式Output configuration : N:NPN输出 DC 3-wire,NPN P:PNP输出DC 3-wire,PNP	输出状态 Operation mode: K:常开 B:常闭	产品等级 Product grade: Z:Z级	线缆长度 Cable length (标配2米 Standard Cable length is 2m) 5 : 5m	客户定制 Customized informat

#### ▶ 产品种类 Product Category

型号 Model	形状 Appearance	检测距离 Sensing distance	输出规格 Output configuration	动作状态 Operation mode	连接方式 Connection mode
MI03-01NK-Z MI04-01NK-Z MI05-01NK-Z	埋入 Shielded	1mm	N:NPN输出 DC 3-wire,NPN P:PNP输出DC 3-wire,PNP	K:常开 NO B:常闭 NC	导线引出/航插


#### ▶ 技术规格 Specification

型号Type	MI04-1N/P
电源电压 Voltage	直流NPN/PNP 10-30VDC
检测距离 Sensing distance	1mm
消耗电流 Leakage current	10mA max.
负载电流 Load current	100mA max.
极性保护 Polarity protection	Yes
工作状态指示灯 Indicator	动作显示(红色LED) Operation indicator(Red LED)
环境温度 Ambient temperature	-25~+70°C(不结冰与无霜)
环境湿度 Ambient humidity	工作时/保存时 Operating/Storage:35~95%RH
绝缘电阻 Insulation resistance	50MΩ max. (DC500V) 充电部总体与外壳间 Between current -carrying parts and case
耐电压 Dielectric strength	AC500V max. 50~60Hz 1min 充电部总体与外壳间 Between current -carrying parts and case
重复精度 Repeat precision	<3%
漏电流 Load current	<0.1mA
回差范围 Backlash	1-20%
压降 Drop	<2.5V
振动(耐久) Vibration resistance	10~55Hz 复振幅1.5mmX , Y , Z各方向2h double amplitude for 2 hours each in X , Y and Z directions
冲击(耐久) Shock resistance	500m/s <sup>2</sup> X , Y , Z各方向10次 500m/s <sup>2</sup> 10 times each X , Y and Z directions
防护等级 Degree of protection	IEC IP67
外壳 Case	镍铜合金 Brass-nicke plated

#### ▶ 电路输出方式(示例) Example for output circuit



#### ▶ 安装尺寸图 Mounting Dimensions(单位Unit:mm)

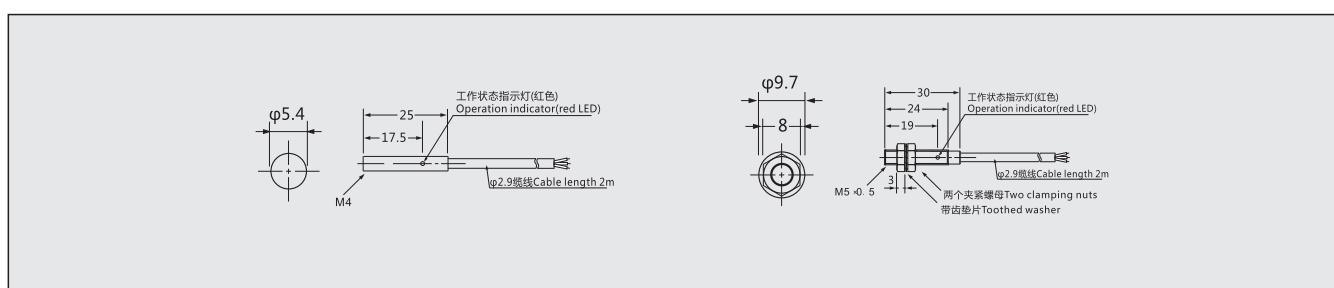

编码器/磁栅尺  
Encoder/Magnetic Scale

位移/倾角/计数器  
Displacement / Inclination / Counter

接近/加速度/温度  
Proximity/Acceleration/Temperature

光电/超声波/区域  
Photoelectric/Ultrasonic/Area

压力/称重  
Pressure / load cell

联轴器/附件  
Coupling/Accessories