

可以检测磁铁，单极性，双极性可选，
可以安装在金属上

霍尔接近传感器MH12系列 Hall proximity sensor MH12 series

Can detect magnet, unipolar, bipolar
optional, can be installed on metal



▶ 型号说明 Model Explanation

M	H	12	-10	N	K	-Z	-□	-□
基本型号Model M:型号代码 Model code M□: 特殊型号定义 Special definition	传感器类别: H:霍尔 Hall proximity sensor	直径OD: 12:12mm	检测距离 Sensing distance: 10:10mm	输出方式Output configuration: N:NPN输出 DC 3-wire,NPN P:PNP输出DC 3-wire,PNP	输出状态 Operation mode: K:常开 NO B:常闭 NC	产品等级 Product grade: Z:Z级	线缆长度 Cable length (标配2米 Standard Cable length is 2m) 5 : 5m	客户定制 Customized informat

▶ 产品种类 Product Category

型号 Model	形状 Appearance	检测距离 Sensing distance	输出规格 Output configuration	动作状态 Operation mode	连接方式 Connection mode
MH12-10NK-Z	埋入 Shielded	10mm	N:NPN输出 DC 3-wire,NPN P:PNP输出DC 3-wire,PNP	K:常开 NO B:常闭 NC	导线引出/航插 Cable line/Plug


▶ 技术规格 Specification

型号Type	MH12-10N/P
电源电压 Voltage	直流NPN/PPN 10-30VDC
检测距离 Sensing distance	10mm
消耗电流 Leakage current	<10mA
极性保护 Polarity protection	Yes/Yes
工作状态指示灯 Indicator	动作显示(红色LED) Operation indicator(Red LED)
环境温度 Ambient temperature	-25~+70°C(不结冰with no icing)
环境湿度 Ambient humidity	工作时/保存时 Operating/Storage:35~95%RH
绝缘电阻 Insulation resistance	50MΩ max. (DC500V)充电部总体与外壳间Between current -carrying parts and case
耐电压 Dielectric strength	AC500V max. 50~60Hz 1min 充电部总体与外壳间Between current -carrying parts and case
重复精度 Repeat precision	<3%
负载电流 Load current	<150mA
回差范围 Backlash	1-20%
压降 Drop	<2.5V
振动(耐久) Vibration resistance	10~55Hz复振幅1.5mmX , Y , Z各方向2h double amplitude for 2 hours each in X , Y and Z directions
冲击(耐久) Shock resistance	500m/s ² X , Y , Z各方向10次 500m/s ² 10 times each X , Y and Z directions
防护等级 Degree of protection	IEC IP67
外壳 Case	镍铜合金 Brass-nicke plated

▶ 电路输出方式(示例) Example for output circuit



▶ 安装尺寸图 Mounting Dimensions(单位Unit:mm)

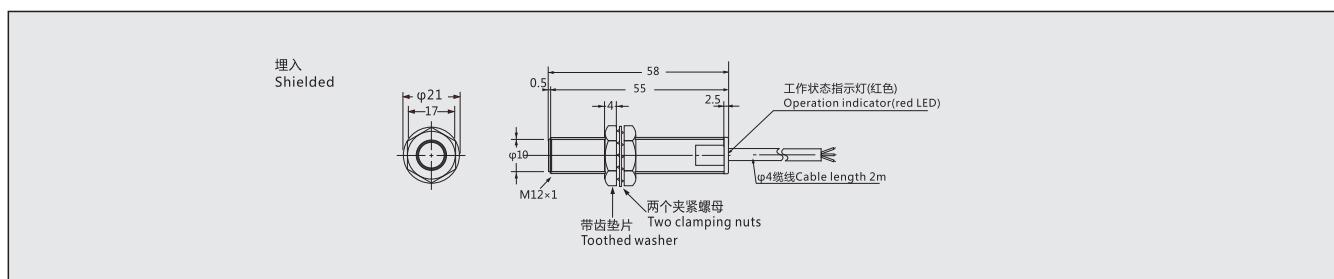

编码器/磁栅尺
Encoder/Magnetic Scale

位移/倾角/计数器
Displacement / Inclination / Counter

接近/加速度/温度
Proximity/Acceleration/Temperature

光电/超声波/区域
Photoelectric/Ultrasonic/Area

压力/称重
Pressure / load cell

联轴器/附件
Coupling/Accessories