



适用于多种用途，产品性能与品质良好，
金属外壳，便于安装保护，灵敏度可以
调节


圆柱形回归反射光电传感器MP18系列

Cylindrical retro reflective photoelectric sensor mp18 series

It is suitable for a variety of purposes, with
good product performance and quality.

The metal shell is easy to install and protect,

and the sensitivity can be adjusted

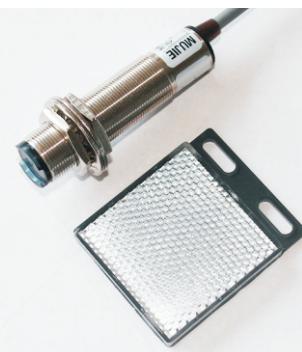

▶ 型号说明 Model Explanation

M	P	18	-2	R	N	K	-Z	-□	-□
基本型号Model M:型号代码 Model code M: 特殊型号定义 Speciall definition	传感器类别： P:圆柱形光电 Cylindrical photoelectric sensor	直径OD: 18:18mm	检测距离 Sensing distance: 2:2m	检测方式 Sensing method : D:漫反射 Diffuse reflective R:回归反射 Retro- Reflective with MSR function T:对射Throughbeam	输出方式Output configuration : N:NPN输出 DC 3-wire,NPN P:PNP输出DC 3-wire,PNP A:交流两线输出 AC 2-wire	输出状态 Operation mode: K:常开 NO B:常闭 NC KB:常开+常闭 NO+NC	产品等级 Product grade: Z:Z级	线缆长度 Cable length (标配2米 Standard Cable length is 2m) 5 : 5m	客户定制 Customized informat


▶ 产品种类 Product Category

型号 Model	形状 Appearance	检测距离 Sensing distance	输出规格 Output configuration	动作状态 Operation mode	连接方式 Connection mode
MP18-2RNK-Z			2m N:NPN输出 DC 3-wire,NPN P:PNP输出 DC 3-wire,PNP A:交流两线输出 AC 2-wire	K:常开 NO B:常闭 NC KB:常开+常闭 NO+NC	导线引出 Cable line


▶ 技术规格 Specification

型号Type	MP18-2 RN/RP/RA
电源电压 Voltage	直流NPN/PNP/DC:10-30VDC
检测距离 Sensing distance	2m
光源Light source	红外发光二极管Infrared LED
应差距离Differential travel	检测距离的10%以下 10%max.of sensing distance
消耗电流 Leakage current	25mA max.
响应时间 Response time	2ms max.
输出/电源指示 Output/Power indication	-/红色LED Red LED
回路保护Protection circuits	电源逆向保护输出短路保护 Power supply reverse polarity, Output short-circuit protection
环境照度Ambient illumination	太阳光Sunlight:1000lx,白炽灯Incandescent lamp:3000lx
环境温度Ambient temperature	-25~+55°C(不结冰with no icing)
环境湿度Ambient humidity	工作时/保存时 Operating35~85°RH/Storage:35~95°RH(不结露with no condensation)
绝缘电阻Insulation resistance	20MΩ max. (DC500V)充电部总体与外壳间Between current -carrying parts and case
耐电压Dielectric strength	AC1000V max. 50~60Hz 1min 充电部总体与外壳间Between current -carrying parts and case
重复精度Repeat precision	<5%
负载电流Load current	<200mA
压降Drop	<1.5V
振动(耐久)Vibration resistance	10~55Hz复振幅1.5mmX , Y , Z各方向2h double amplitude for 2 hours each in X , Y and Z directions
冲击(耐久)Shock resistance	500m/s ² X , Y , Z各方向10次 500m/s ² 10 times each X , Y and Z directions
防护等级Degree of protection	IEC IP65
材质 Material(外壳Case /透镜Lens)	镀镍黄铜 Brass-nicke plated /PMMA

▶ 电路输出方式(示例) Example for output circuit

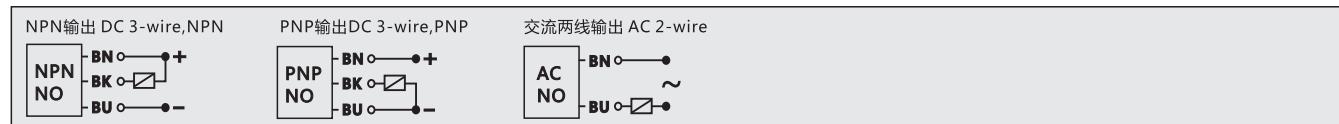

▶ 安装尺寸图 Mounting Dimensions(单位Unit:mm)

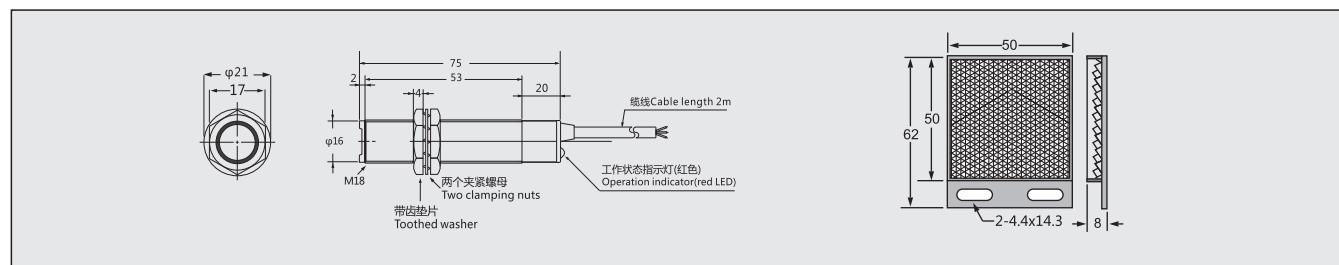

编码器/磁栅尺
Encoder/Magnetic Scale

位移/倾角/计数器
Displacement/inclination/counter

接近/加速度/温度
Proximity/acceleration/temperature

光电/超声波/区域
Photoelectric/Ultrasonic/Area

压力/称重
Pressure / loadcell

联轴器/附件
Coupling/Accessories