

# MUJIE 慕杰®

YOUR AUTOMATION, YOUR MUJIE!

适用于多种用途，产品性能与品质良好  
金属外壳，便于安装保护，灵敏度可以调节

## 方形回归反射光电传感器MJK系列

Square regression reflection photoelectric sensor MJK series

It is suitable for a variety of purposes. The metal shell with good product performance and quality is easy to install and protect, and the sensitivity can be adjusted



### 型号说明 Model Explanation

M	JK	-2	R	M	K	-Z	-□	-□
基本型号 Model M:型号代码 Model code M□: 特殊型号定义 Special definition	传感器类别: JK:方形光电 Rectangular photoelectric sensor	检测距离 Sensing distance: 2:2m 4:4m	检测方式 Sensing method: D:漫反射 Diffusere- flective R:回归反射 Retro- Reflective with MSR function T:对射Throughbeam	输出方式 Output configuration: M:继电器输出 Relay N:NPN输出 DC 3-wire, NPN P:PNP输出 DC 3-wire, PNP A:交流两线输出 AC 2-wire	输出状态 Operation mode: K:常开 NO B:常闭 NC KB:常开+常闭 NO+NC	产品等级 Product grade: Z:Z级	线缆长度 Cable length (标配2米 Standard Cable length is 2m) 5 : 5m	客户定制 Customized informat

### 产品种类 Product Category

型号 Model	形状 Appearance	检测距离 Sensing distance	输出规格 Output configuration	动作状态 Operation mode	连接方式 Connection mode
MJK-2RMK-Z		2m	M:继电器输出 Relay N:NPN输出 DC 3-wire, NPN P:PNP输出 DC 3-wire, PNP A:交流两线输出 AC 2-wire	K:常开 NO B:常闭 NC KB:常开+常闭 NO+NC	导线引出 Cable line
MJK-4RMK-Z		4m			


### 技术规格 Specification

型号 Type	MJK-2/4 RM	MJK-2/4 RM2
电源电压 Voltage	交直流:12-240V	
检测距离 Sensing distance	2m/4m	
光源 Light source	红外发光二极管 Infrared LED	
动作模式 Operation mode	入光时 ON Light-ON	遮光时 ON Dark-ON
消耗电流 Leakage current	DC/AC 2W max.	
响应时间 Response time	30ms max.	
输出/电源指示 Output/Power indication	-/红色 LED Red LED	
回路保护 Protection circuits	电源逆向保护, 输出短路保护 Power supply reverse polarity, Output short-circuit protection	
环境照度 Ambient illumination	白炽灯 Incandescent lamp: 3000lx	
环境温度 Ambient temperature	动作时 Operating: -25~+55°C, 保存时 Storage: -40~+70°C (不结冰 with no icing)	
环境湿度 Ambient humidity	工作时/保存时 Operating/Storage: 35~85%RH/35~95%RH (不结露 with no condensation)	
绝缘电阻 Insulation resistance	20MΩ max. (DC500V) 充电部总体与外壳间 Between current -carrying parts and case	
耐电压 Dielectric strength	AC1500V max. 50~60Hz 1min 充电部总体与外壳间 Between current -carrying parts and case	
重复精度 Repeat precision	<5%	
负载电流 Load current	<1A	
压降 Drop	<0.5V	
振动(耐久) Vibration resistance	10~55Hz 复振幅 1.5mm X, Y, Z 各方向 2h double amplitude for 2 hours each in X, Y and Z directions	
冲击(耐久) Shock resistance	500m/s <sup>2</sup> X, Y, Z 各方向 10次 500m/s <sup>2</sup> 10 times each X, Y and Z directions	
防护等级 Degree of protection	IEC IP64	
材质 Material	丙烯酸酯树脂 Methacrylic	

### 电路输出方式(示例) Example for output circuit

继电器输出 Relay DC 5-wire	继电器输出 Relay AC 5-wire	继电器输出 Relay DC+AC 5-wire
 BN ○ 10to240VDC BU ○ Tc WH ○ Ta BK ○ Tb GY ○	 BN ○ 90to250VAC BU ○ Tc WH ○ Ta BK ○ Tb GY ○ 3A250VAC	 BN ○ 24to240VAC BU ○ Tc WH ○ 12to240VDC BK ○ Ta GY ○ 3A250VAC

### 安装尺寸图 Mounting Dimensions(单位 Unit:mm)

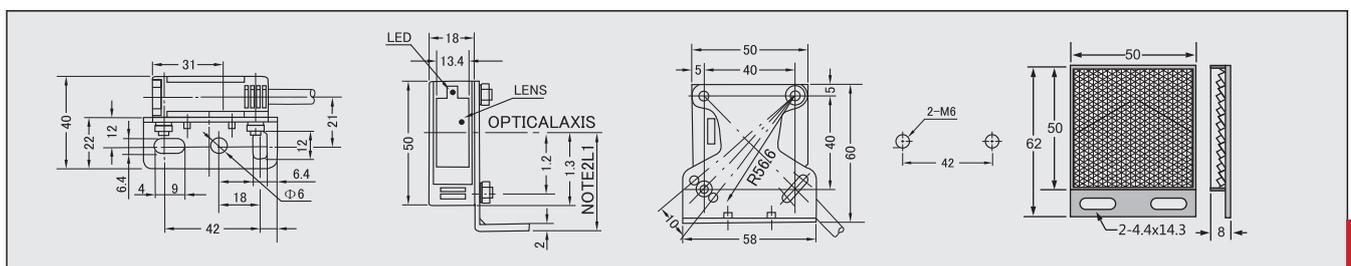

编码器/磁栅尺  
Encoder/Magnetic Scale

位移/倾角/计数器  
Displacement /Inclination /Counter

接近/加速度/温度  
Proximity/Acceleration/Temperature

光电/超声波/区域  
Photoelectric/Ultrasonic/Area

压力/称重  
Pressure / load cell

联轴器/附件  
Couplings/Accessories