




单相固态继电器MRT系列

Single-phase solid-state relay MRT series

MUJIE-INT

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																								
 MRT-40AA (AC TO AC)	<table border="1"> <tr><td>Load Current</td><td>10A、25A、40A、50A 60A、75A、90A、100A</td></tr> <tr><td>Load Voltage</td><td>24-380VAC</td></tr> <tr><td>Control Voltage</td><td>80-250VAC</td></tr> <tr><td>Control Current</td><td>AC < 12mA</td></tr> <tr><td>On Voltage</td><td>≤ 1.5VAC</td></tr> <tr><td>Off Leakage Current</td><td>≤ 4mA</td></tr> <tr><td>On-off Time</td><td>≤ 10ms</td></tr> <tr><td>Dielectric Strength</td><td>Input - output - floor > 2500VAC</td></tr> <tr><td>Insulation Resistance</td><td>1000MΩ/500VDC</td></tr> <tr><td>Ambient Temperature</td><td>-30~+75°C</td></tr> <tr><td>Mounting Methods</td><td>Bolt fixing</td></tr> <tr><td>Weight</td><td>132g</td></tr> </table>	Load Current	10A、25A、40A、50A 60A、75A、90A、100A	Load Voltage	24-380VAC	Control Voltage	80-250VAC	Control Current	AC < 12mA	On Voltage	≤ 1.5VAC	Off Leakage Current	≤ 4mA	On-off Time	≤ 10ms	Dielectric Strength	Input - output - floor > 2500VAC	Insulation Resistance	1000MΩ/500VDC	Ambient Temperature	-30~+75°C	Mounting Methods	Bolt fixing	Weight	132g	 62Lx45Wx23.5H
Load Current	10A、25A、40A、50A 60A、75A、90A、100A																									
Load Voltage	24-380VAC																									
Control Voltage	80-250VAC																									
Control Current	AC < 12mA																									
On Voltage	≤ 1.5VAC																									
Off Leakage Current	≤ 4mA																									
On-off Time	≤ 10ms																									
Dielectric Strength	Input - output - floor > 2500VAC																									
Insulation Resistance	1000MΩ/500VDC																									
Ambient Temperature	-30~+75°C																									
Mounting Methods	Bolt fixing																									
Weight	132g																									

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																								
 MRT-40VA (potentiometer TO AC)	<table border="1"> <tr><td>Load Current</td><td>10A 25A 40A 50A 60A、75A、90A、100A</td></tr> <tr><td>Load Voltage</td><td>24-380VAC</td></tr> <tr><td>Control Voltage</td><td>VR:250KΩ/110VAC ; 500KΩ/220VAC</td></tr> <tr><td>Control Current</td><td>/</td></tr> <tr><td>On Voltage</td><td>≤ 1.5V</td></tr> <tr><td>Off Leakage Current</td><td>≤ 4mA</td></tr> <tr><td>On-off Time</td><td>/</td></tr> <tr><td>Dielectric Strength</td><td>Input - output - floor > 2500VAC</td></tr> <tr><td>Insulation Resistance</td><td>1000MΩ/500VDC</td></tr> <tr><td>Ambient Temperature</td><td>-30~+75°C</td></tr> <tr><td>Mounting Methods</td><td>Bolt fixing</td></tr> <tr><td>Weight</td><td>132g</td></tr> </table>	Load Current	10A 25A 40A 50A 60A、75A、90A、100A	Load Voltage	24-380VAC	Control Voltage	VR:250KΩ/110VAC ; 500KΩ/220VAC	Control Current	/	On Voltage	≤ 1.5V	Off Leakage Current	≤ 4mA	On-off Time	/	Dielectric Strength	Input - output - floor > 2500VAC	Insulation Resistance	1000MΩ/500VDC	Ambient Temperature	-30~+75°C	Mounting Methods	Bolt fixing	Weight	132g	 62Lx45Wx23.5H
Load Current	10A 25A 40A 50A 60A、75A、90A、100A																									
Load Voltage	24-380VAC																									
Control Voltage	VR:250KΩ/110VAC ; 500KΩ/220VAC																									
Control Current	/																									
On Voltage	≤ 1.5V																									
Off Leakage Current	≤ 4mA																									
On-off Time	/																									
Dielectric Strength	Input - output - floor > 2500VAC																									
Insulation Resistance	1000MΩ/500VDC																									
Ambient Temperature	-30~+75°C																									
Mounting Methods	Bolt fixing																									
Weight	132g																									

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																								
 MRT-40DD (DC TO DC)	<table border="1"> <tr><td>Load Current</td><td>10A 25A 40A 60A、80A、100A、120A</td></tr> <tr><td>Load Voltage</td><td>60VDC</td></tr> <tr><td>Control Voltage</td><td>5-32VDC</td></tr> <tr><td>Control Current</td><td>DC 15-35MA</td></tr> <tr><td>On Voltage</td><td>≤ 1.5V</td></tr> <tr><td>Off Leakage Current</td><td>≤ 2mA</td></tr> <tr><td>On-off Time</td><td>≤ 10ms</td></tr> <tr><td>Dielectric Strength</td><td>Input - output - floor > 2500VAC</td></tr> <tr><td>Insulation Resistance</td><td>1000MΩ/500VDC</td></tr> <tr><td>Ambient Temperature</td><td>-30~+75°C</td></tr> <tr><td>Mounting Methods</td><td>Bolt fixing</td></tr> <tr><td>Weight</td><td>90g (10A, 25A) 135g (>40A)</td></tr> </table>	Load Current	10A 25A 40A 60A、80A、100A、120A	Load Voltage	60VDC	Control Voltage	5-32VDC	Control Current	DC 15-35MA	On Voltage	≤ 1.5V	Off Leakage Current	≤ 2mA	On-off Time	≤ 10ms	Dielectric Strength	Input - output - floor > 2500VAC	Insulation Resistance	1000MΩ/500VDC	Ambient Temperature	-30~+75°C	Mounting Methods	Bolt fixing	Weight	90g (10A, 25A) 135g (>40A)	 62Lx45Wx23.5H
Load Current	10A 25A 40A 60A、80A、100A、120A																									
Load Voltage	60VDC																									
Control Voltage	5-32VDC																									
Control Current	DC 15-35MA																									
On Voltage	≤ 1.5V																									
Off Leakage Current	≤ 2mA																									
On-off Time	≤ 10ms																									
Dielectric Strength	Input - output - floor > 2500VAC																									
Insulation Resistance	1000MΩ/500VDC																									
Ambient Temperature	-30~+75°C																									
Mounting Methods	Bolt fixing																									
Weight	90g (10A, 25A) 135g (>40A)																									

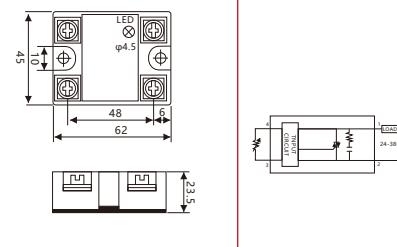
说明：1. 负载10A，必须安装散热器，40A以上加风扇强冷或水冷；
Instructions: 1. Load 10A, radiator must be installed, more than 40A plus fan strong cold or water cooling;

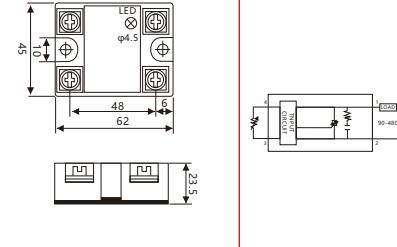
2. 使用感应负载时，尽量将热敏电阻放在感应端，并取其值的0.6-1.9倍。58Lx45Wx28H
2. when using inductive load, besuretooutputtheoftagesensitiveresistorattheojtpcit end, andtakethe value of the load vottagel .6-1.9times.
58Lx45Wx28H

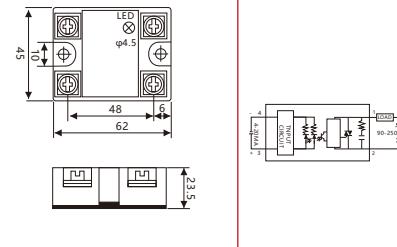
单相固态继电器MRT系列

Single-phase solid-state relay MRTseries

MUJIE-INT

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																								
 MRT-40DA (DC TO AC)	<table border="1"> <tr><td>Load Current</td><td>10A, 25A, 40A, 50A</td></tr> <tr><td>Load Voltage</td><td>24-380VAC</td></tr> <tr><td>Control Voltage</td><td>3-32VDC</td></tr> <tr><td>Control Current</td><td>DC 5-25mA</td></tr> <tr><td>On Voltage</td><td>≤ 1.5VAC</td></tr> <tr><td>Off Leakage Current</td><td>≤ 2mA</td></tr> <tr><td>On-off Time</td><td>≤ 10mS</td></tr> <tr><td>Dielectric Strength</td><td>Input - output - floor >2500VAC</td></tr> <tr><td>Insulation Resistance</td><td>1000MΩ/500VDC</td></tr> <tr><td>Ambient Temperature</td><td>-30~+75°C</td></tr> <tr><td>Mounting Methods</td><td>Bolt fixing</td></tr> <tr><td>Weight</td><td>132g</td></tr> </table>	Load Current	10A, 25A, 40A, 50A	Load Voltage	24-380VAC	Control Voltage	3-32VDC	Control Current	DC 5-25mA	On Voltage	≤ 1.5VAC	Off Leakage Current	≤ 2mA	On-off Time	≤ 10mS	Dielectric Strength	Input - output - floor >2500VAC	Insulation Resistance	1000MΩ/500VDC	Ambient Temperature	-30~+75°C	Mounting Methods	Bolt fixing	Weight	132g	
Load Current	10A, 25A, 40A, 50A																									
Load Voltage	24-380VAC																									
Control Voltage	3-32VDC																									
Control Current	DC 5-25mA																									
On Voltage	≤ 1.5VAC																									
Off Leakage Current	≤ 2mA																									
On-off Time	≤ 10mS																									
Dielectric Strength	Input - output - floor >2500VAC																									
Insulation Resistance	1000MΩ/500VDC																									
Ambient Temperature	-30~+75°C																									
Mounting Methods	Bolt fixing																									
Weight	132g																									

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																								
 MRT-40DA-H (DC TO AC)	<table border="1"> <tr><td>Load Current</td><td>10A, 25A, 40A, 50A</td></tr> <tr><td>Load Voltage</td><td>90-480VAC</td></tr> <tr><td>Control Voltage</td><td>4-32VDC</td></tr> <tr><td>Control Current</td><td>DC5-15mA</td></tr> <tr><td>On Voltage</td><td>≤ 1.5VAC</td></tr> <tr><td>Off Leakage Current</td><td>≤ 4mA</td></tr> <tr><td>On-off Time</td><td>≤ 10mS</td></tr> <tr><td>Dielectric Strength</td><td>Input - output - floor >2500VAC</td></tr> <tr><td>Insulation Resistance</td><td>1000MΩ/500VDC</td></tr> <tr><td>Ambient Temperature</td><td>-30~+75°C</td></tr> <tr><td>Mounting Methods</td><td>Bolt fixing</td></tr> <tr><td>Weight</td><td>132g</td></tr> </table>	Load Current	10A, 25A, 40A, 50A	Load Voltage	90-480VAC	Control Voltage	4-32VDC	Control Current	DC5-15mA	On Voltage	≤ 1.5VAC	Off Leakage Current	≤ 4mA	On-off Time	≤ 10mS	Dielectric Strength	Input - output - floor >2500VAC	Insulation Resistance	1000MΩ/500VDC	Ambient Temperature	-30~+75°C	Mounting Methods	Bolt fixing	Weight	132g	
Load Current	10A, 25A, 40A, 50A																									
Load Voltage	90-480VAC																									
Control Voltage	4-32VDC																									
Control Current	DC5-15mA																									
On Voltage	≤ 1.5VAC																									
Off Leakage Current	≤ 4mA																									
On-off Time	≤ 10mS																									
Dielectric Strength	Input - output - floor >2500VAC																									
Insulation Resistance	1000MΩ/500VDC																									
Ambient Temperature	-30~+75°C																									
Mounting Methods	Bolt fixing																									
Weight	132g																									

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																								
 MRT-40AA (AC TO AC)	<table border="1"> <tr><td>Load Current</td><td>10A 25A 40A 50A</td></tr> <tr><td>Load Voltage</td><td>24-380VAC</td></tr> <tr><td>Control Voltage</td><td>80-250VDC</td></tr> <tr><td>Control Current</td><td>Dc≤ 12MA</td></tr> <tr><td>On Voltage</td><td>≤ 1.5VAC</td></tr> <tr><td>Off Leakage Current</td><td>≤ 4mA</td></tr> <tr><td>On-off Time</td><td>≤ 10mS</td></tr> <tr><td>Dielectric Strength</td><td>Input - output - floor >2500VAC</td></tr> <tr><td>Insulation Resistance</td><td>1000MΩ/500VDC</td></tr> <tr><td>Ambient Temperature</td><td>-30~+75°C</td></tr> <tr><td>Mounting Methods</td><td>Bolt fixing</td></tr> <tr><td>Weight</td><td>132g</td></tr> </table>	Load Current	10A 25A 40A 50A	Load Voltage	24-380VAC	Control Voltage	80-250VDC	Control Current	Dc≤ 12MA	On Voltage	≤ 1.5VAC	Off Leakage Current	≤ 4mA	On-off Time	≤ 10mS	Dielectric Strength	Input - output - floor >2500VAC	Insulation Resistance	1000MΩ/500VDC	Ambient Temperature	-30~+75°C	Mounting Methods	Bolt fixing	Weight	132g	
Load Current	10A 25A 40A 50A																									
Load Voltage	24-380VAC																									
Control Voltage	80-250VDC																									
Control Current	Dc≤ 12MA																									
On Voltage	≤ 1.5VAC																									
Off Leakage Current	≤ 4mA																									
On-off Time	≤ 10mS																									
Dielectric Strength	Input - output - floor >2500VAC																									
Insulation Resistance	1000MΩ/500VDC																									
Ambient Temperature	-30~+75°C																									
Mounting Methods	Bolt fixing																									
Weight	132g																									

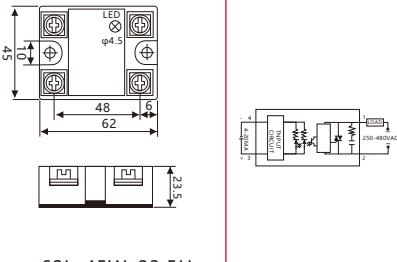
说明：1. 负载10A，必须安装散热器，40A以上加风扇强冷或水冷；
 Instructions: 1. Load 10A, radiator must be installed, more than 40A plus fan strong cold or water cooling;

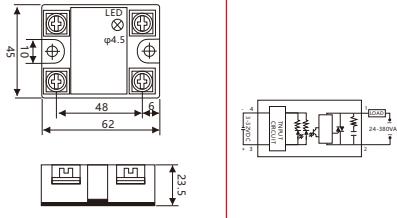
2. 使用感应负载时，尽量将热敏电阻放在感应端，并取其值的0.6-1.9倍。58Lx45Wx28H
 2. when using inductive load, besuretooutputtheoftagesensitiveresistorattheojtpcit end, andtakethe value of the load vottagel .6-1.9times.
 58Lx45Wx28H

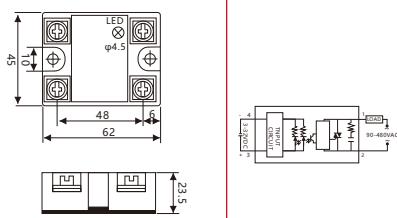
单相固态继电器MRT系列

Single-phase solid-state relay MRT series

MUJIE-INT

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																								
 MRT-40AA-H (AC TO AC)	<table border="1"> <tr><td>Load Current</td><td>10A 25A 40A 50A 60A、75A、90A、100A</td></tr> <tr><td>Load Voltage</td><td>90-480VAC</td></tr> <tr><td>Control Voltage</td><td>80-250VAC</td></tr> <tr><td>Control Current</td><td>Dc≤ 12MA</td></tr> <tr><td>On Voltage</td><td>≤ 1.5VAC</td></tr> <tr><td>Off Leakage Current</td><td>≤ 4mA</td></tr> <tr><td>On-off Time</td><td>≤ 10mS</td></tr> <tr><td>Dielectric Strength</td><td>Input - output - floor >2500VAC</td></tr> <tr><td>Insulation Resistance</td><td>1000MΩ/500VDC</td></tr> <tr><td>Ambient Temperature</td><td>-30~+75°C</td></tr> <tr><td>Mounting Methods</td><td>Bolt fixing</td></tr> <tr><td>Weight</td><td>132g</td></tr> </table>	Load Current	10A 25A 40A 50A 60A、75A、90A、100A	Load Voltage	90-480VAC	Control Voltage	80-250VAC	Control Current	Dc≤ 12MA	On Voltage	≤ 1.5VAC	Off Leakage Current	≤ 4mA	On-off Time	≤ 10mS	Dielectric Strength	Input - output - floor >2500VAC	Insulation Resistance	1000MΩ/500VDC	Ambient Temperature	-30~+75°C	Mounting Methods	Bolt fixing	Weight	132g	
Load Current	10A 25A 40A 50A 60A、75A、90A、100A																									
Load Voltage	90-480VAC																									
Control Voltage	80-250VAC																									
Control Current	Dc≤ 12MA																									
On Voltage	≤ 1.5VAC																									
Off Leakage Current	≤ 4mA																									
On-off Time	≤ 10mS																									
Dielectric Strength	Input - output - floor >2500VAC																									
Insulation Resistance	1000MΩ/500VDC																									
Ambient Temperature	-30~+75°C																									
Mounting Methods	Bolt fixing																									
Weight	132g																									

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																								
 MRT-40VA (potentiometer TO AC)	<table border="1"> <tr><td>Load Current</td><td>10A、25A、40A、50A 60A、75A、90A、100A</td></tr> <tr><td>Load Voltage</td><td>24-380VAC</td></tr> <tr><td>Control Voltage</td><td>VR:250KΩ/110VAC ; 500KΩ/220VAC</td></tr> <tr><td>Control Current</td><td>/</td></tr> <tr><td>On Voltage</td><td>≤ 1.5VAC</td></tr> <tr><td>Off Leakage Current</td><td>≤ 2mA</td></tr> <tr><td>On-off Time</td><td>/</td></tr> <tr><td>Dielectric Strength</td><td>Input - output - floor ≥2500VAC</td></tr> <tr><td>Insulation Resistance</td><td>1000MΩ/500VDC</td></tr> <tr><td>Ambient Temperature</td><td>-30~+75°C</td></tr> <tr><td>Mounting Methods</td><td>Bolt fixing</td></tr> <tr><td>Weight</td><td>132g</td></tr> </table>	Load Current	10A、25A、40A、50A 60A、75A、90A、100A	Load Voltage	24-380VAC	Control Voltage	VR:250KΩ/110VAC ; 500KΩ/220VAC	Control Current	/	On Voltage	≤ 1.5VAC	Off Leakage Current	≤ 2mA	On-off Time	/	Dielectric Strength	Input - output - floor ≥2500VAC	Insulation Resistance	1000MΩ/500VDC	Ambient Temperature	-30~+75°C	Mounting Methods	Bolt fixing	Weight	132g	
Load Current	10A、25A、40A、50A 60A、75A、90A、100A																									
Load Voltage	24-380VAC																									
Control Voltage	VR:250KΩ/110VAC ; 500KΩ/220VAC																									
Control Current	/																									
On Voltage	≤ 1.5VAC																									
Off Leakage Current	≤ 2mA																									
On-off Time	/																									
Dielectric Strength	Input - output - floor ≥2500VAC																									
Insulation Resistance	1000MΩ/500VDC																									
Ambient Temperature	-30~+75°C																									
Mounting Methods	Bolt fixing																									
Weight	132g																									

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																								
 MRT-40VA-H (potentiometer TO AC)	<table border="1"> <tr><td>Load Current</td><td>10A、25A、40A、50A 60A、75A、90A、100A</td></tr> <tr><td>Load Voltage</td><td>90-480VAC</td></tr> <tr><td>Control Voltage</td><td>VR:500KΩ/220VAC ; 1MΩ/380VAC</td></tr> <tr><td>Control Current</td><td>/</td></tr> <tr><td>On Voltage</td><td>≤ 1.5VAC</td></tr> <tr><td>Off Leakage Current</td><td>≤ 4mA</td></tr> <tr><td>On-off Time</td><td>/</td></tr> <tr><td>Dielectric Strength</td><td>2500VAC</td></tr> <tr><td>Insulation Resistance</td><td>1000MΩ/500VDC</td></tr> <tr><td>Ambient Temperature</td><td>-30~+75°C</td></tr> <tr><td>Mounting Methods</td><td>Bolt fixing</td></tr> <tr><td>Weight</td><td>132g</td></tr> </table>	Load Current	10A、25A、40A、50A 60A、75A、90A、100A	Load Voltage	90-480VAC	Control Voltage	VR:500KΩ/220VAC ; 1MΩ/380VAC	Control Current	/	On Voltage	≤ 1.5VAC	Off Leakage Current	≤ 4mA	On-off Time	/	Dielectric Strength	2500VAC	Insulation Resistance	1000MΩ/500VDC	Ambient Temperature	-30~+75°C	Mounting Methods	Bolt fixing	Weight	132g	
Load Current	10A、25A、40A、50A 60A、75A、90A、100A																									
Load Voltage	90-480VAC																									
Control Voltage	VR:500KΩ/220VAC ; 1MΩ/380VAC																									
Control Current	/																									
On Voltage	≤ 1.5VAC																									
Off Leakage Current	≤ 4mA																									
On-off Time	/																									
Dielectric Strength	2500VAC																									
Insulation Resistance	1000MΩ/500VDC																									
Ambient Temperature	-30~+75°C																									
Mounting Methods	Bolt fixing																									
Weight	132g																									

说明：1. 负载10A，必须安装散热器，40A以上加风扇强冷或水冷；
Instructions: 1. Load 10A, radiator must be installed, more than 40A plus fan strong cold or water cooling;

2. 使用感应负载时，尽量将热敏电阻放在感应端，并取其值的0.6-1.9倍。58Lx45Wx28H
2. when using inductive load, besuretooutputtheoftagesensitiveresistorattheojtpcit end, andtakethe value of the load vottagel .6-1.9times.
58Lx45Wx28H

单相固态继电器MRT系列

Single-phase solid-state relay MRT series

MUJIE-INT

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																										
MRT-40LA	<table border="1"> <tr><td>Load Current</td><td>10A 25A 40A 50A</td></tr> <tr><td>Load Voltage</td><td>60A、75A、90A、100A</td></tr> <tr><td>Control Voltage</td><td>90-250VAC</td></tr> <tr><td>Control Current</td><td>/</td></tr> <tr><td>On Voltage</td><td>DC4-20MA</td></tr> <tr><td>Off Leakage Current</td><td>≤ 1.5V</td></tr> <tr><td>On-off Time</td><td>≤ 2mA</td></tr> <tr><td>Dielectric Strength</td><td>≤ 10mS</td></tr> <tr><td>Insulation Resistance</td><td>2000VAC</td></tr> <tr><td>Ambient Temperature</td><td>1000MΩ/500VDC</td></tr> <tr><td>Mounting Methods</td><td>-30~+75°C</td></tr> <tr><td>Weight</td><td>Bolt fixing</td></tr> <tr><td></td><td>132g</td></tr> </table>	Load Current	10A 25A 40A 50A	Load Voltage	60A、75A、90A、100A	Control Voltage	90-250VAC	Control Current	/	On Voltage	DC4-20MA	Off Leakage Current	≤ 1.5V	On-off Time	≤ 2mA	Dielectric Strength	≤ 10mS	Insulation Resistance	2000VAC	Ambient Temperature	1000MΩ/500VDC	Mounting Methods	-30~+75°C	Weight	Bolt fixing		132g	 62Lx45Wx23.5H
Load Current	10A 25A 40A 50A																											
Load Voltage	60A、75A、90A、100A																											
Control Voltage	90-250VAC																											
Control Current	/																											
On Voltage	DC4-20MA																											
Off Leakage Current	≤ 1.5V																											
On-off Time	≤ 2mA																											
Dielectric Strength	≤ 10mS																											
Insulation Resistance	2000VAC																											
Ambient Temperature	1000MΩ/500VDC																											
Mounting Methods	-30~+75°C																											
Weight	Bolt fixing																											
	132g																											

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																										
MRT-40LA-H	<table border="1"> <tr><td>Load Current</td><td>10A 25A 40A 50A</td></tr> <tr><td>Load Voltage</td><td>60A、75A、90A、100A</td></tr> <tr><td>Control Voltage</td><td>250-480VAC</td></tr> <tr><td>Control Current</td><td>/</td></tr> <tr><td>On Voltage</td><td>DC4-20mA</td></tr> <tr><td>Off Leakage Current</td><td>≤ 1.5V</td></tr> <tr><td>On-off Time</td><td>≤ 2mA</td></tr> <tr><td>Dielectric Strength</td><td>≤ 10mS</td></tr> <tr><td>Insulation Resistance</td><td>2000VAC</td></tr> <tr><td>Ambient Temperature</td><td>1000MΩ/500VDC</td></tr> <tr><td>Mounting Methods</td><td>-30~+75°C</td></tr> <tr><td>Weight</td><td>Bolt fixing</td></tr> <tr><td></td><td>132g</td></tr> </table>	Load Current	10A 25A 40A 50A	Load Voltage	60A、75A、90A、100A	Control Voltage	250-480VAC	Control Current	/	On Voltage	DC4-20mA	Off Leakage Current	≤ 1.5V	On-off Time	≤ 2mA	Dielectric Strength	≤ 10mS	Insulation Resistance	2000VAC	Ambient Temperature	1000MΩ/500VDC	Mounting Methods	-30~+75°C	Weight	Bolt fixing		132g	 62Lx45Wx23.5H
Load Current	10A 25A 40A 50A																											
Load Voltage	60A、75A、90A、100A																											
Control Voltage	250-480VAC																											
Control Current	/																											
On Voltage	DC4-20mA																											
Off Leakage Current	≤ 1.5V																											
On-off Time	≤ 2mA																											
Dielectric Strength	≤ 10mS																											
Insulation Resistance	2000VAC																											
Ambient Temperature	1000MΩ/500VDC																											
Mounting Methods	-30~+75°C																											
Weight	Bolt fixing																											
	132g																											

型号 Model and image	技术参数 Technical Parameter	尺寸图 Dimensions(MM)																										
MRT-40DA (DC TO AC)	<table border="1"> <tr><td>Load Current</td><td>10A、25A、40A、50A</td></tr> <tr><td>Load Voltage</td><td>60A、75A、90A、100A</td></tr> <tr><td>Control Voltage</td><td>24-380VAC</td></tr> <tr><td>Control Current</td><td>3-32VDC</td></tr> <tr><td>On Voltage</td><td>DC5-15mA</td></tr> <tr><td>Off Leakage Current</td><td>≤ 1.5V</td></tr> <tr><td>On-off Time</td><td>≤ 2mA</td></tr> <tr><td>Dielectric Strength</td><td>≤ 10mS</td></tr> <tr><td>Insulation Resistance</td><td>Input - output - floor ≥ 2500VAC</td></tr> <tr><td>Ambient Temperature</td><td>1000MΩ/500VDC</td></tr> <tr><td>Mounting Methods</td><td>-30~+75°C</td></tr> <tr><td>Weight</td><td>Bolt fixing</td></tr> <tr><td></td><td>132g</td></tr> </table>	Load Current	10A、25A、40A、50A	Load Voltage	60A、75A、90A、100A	Control Voltage	24-380VAC	Control Current	3-32VDC	On Voltage	DC5-15mA	Off Leakage Current	≤ 1.5V	On-off Time	≤ 2mA	Dielectric Strength	≤ 10mS	Insulation Resistance	Input - output - floor ≥ 2500VAC	Ambient Temperature	1000MΩ/500VDC	Mounting Methods	-30~+75°C	Weight	Bolt fixing		132g	 62Lx45Wx23.5H
Load Current	10A、25A、40A、50A																											
Load Voltage	60A、75A、90A、100A																											
Control Voltage	24-380VAC																											
Control Current	3-32VDC																											
On Voltage	DC5-15mA																											
Off Leakage Current	≤ 1.5V																											
On-off Time	≤ 2mA																											
Dielectric Strength	≤ 10mS																											
Insulation Resistance	Input - output - floor ≥ 2500VAC																											
Ambient Temperature	1000MΩ/500VDC																											
Mounting Methods	-30~+75°C																											
Weight	Bolt fixing																											
	132g																											

说明：1. 负载10A，必须安装散热器，40A以上加风扇强冷或水冷；
Instructions: 1. Load 10A, radiator must be installed, more than 40A plus fan strong cold or water cooling;

2. 使用感应负载时，尽量将热敏电阻放在感应端，并取其值的0.6-1.9倍。58Lx45Wx28H
2. when using inductive load, besuretooutputthevoftagesensitiveresistorattheojtpcit end, andtakethe value of the loadvottagel .6-1.9times.
58Lx45Wx28H